

# SG10KTL-M/SG12KTL-M

String Inverter



### High Yield

- Max. efficiency 98.6 %, European efficiency 98.1 %
- 1.1 overload capacity, 10% more yield under high irradiance
- Adapt to complex power grid, extend the grid - connected generation time
- Patented PID recovery function



### Easy O&M


- 20kg, easy O&M
- Plug and play design, easy installation
- String current monitoring function for fast trouble shooting
- Fast commissioning, easy local and on-line monitoring




### Safe and Reliable

- High power quality, no interference for electrical equipment
- Low radiation, compliance with household equipment standards
- High anti-corrosion with aluminum alloy die casting

### Circuit Diagram

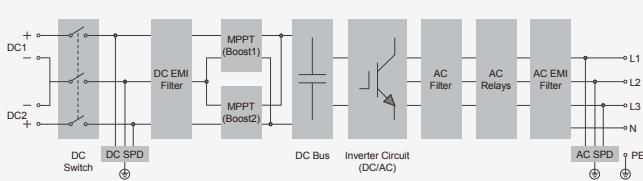

### Efficiency Curve

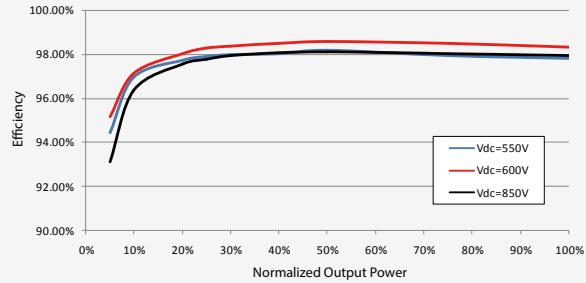

| <b>Input (DC)</b>                                       | <b>SG10KTL-M</b>   | <b>SG12KTL-M</b> |
|---|--|------------------|
| Max. PV input voltage                                   | 1100 V   |                  |
| Min. PV input voltage / Startup input voltage           | 200 V / 250 V  |                  |
| Nominal input voltage                                   | 600 V  |                  |
| MPP voltage range                                       | 200 V – 1000 V   |                  |
| MPP voltage range for nominal power                     | 470 V – 850 V  | 550 V – 850 V    |
| No. of independent MPP inputs                           | 2  |                  |
| Max. number of PV strings per MPPT                      | 1  |                  |
| Max. PV input current (at 35 °C)                        | 22A (11 A / 11 A)  |                  |
| Max. current for input connector                        | 15 A   |                  |
| Max. DC short-circuit current                           | 30 A (15 A / 15 A )  |                  |
| <b>Output (AC)</b>                                      |  |                  |
| Nominal AC power (at 45 °C)                             | 10000 W  | 12000 W          |
| Max. AC output power at PF=1 (at 35 °C)                 | 11000 W  | 13200 W          |
| Max. AC apparent power (at 35 °C)                       | 11000 VA   | 13200 VA         |
| Max. AC output current (at 35 °C)                       | 16.5 A   | 20 A             |
| Nominal AC voltage                                      | 3 / N / PE, 230 / 400 V  |                  |
| AC voltage range  | 270 V – 480 V  |                  |
| Nominal grid frequency / Grid frequency range           | 50 Hz / 45 – 55 Hz, 60 Hz / 55 – 65 Hz   |                  |
| THD   | < 3 % (at nominal power)   |                  |
| DC current injection                                    | < 0.5 % In   |                  |
| Power factor at nominal power / Adjustable power factor | > 0.99 / 0.8 leading – 0.8 lagging   |                  |
| Feed-in phases / Connection phases                      | 3 / 3  |                  |
| <b>Efficiency</b>                                       |  |                  |
| Max. efficiency / Euro. efficiency                      | 98.6 % / 98.1 %  |                  |
| <b>Protection</b>                                       |  |                  |
| Islanding Protection                                    | Yes  |                  |
| LVRT  | No   |                  |
| DC reverse connection protection                        | Yes  |                  |
| AC short-circuit protection                             | Yes  |                  |
| Leakage current protection                              | Yes  |                  |
| Grid monitoring   | Yes  |                  |
| DC switch / AC switch                                   | Yes / No   |                  |
| PV string current monitoring                            | Yes  |                  |
| PID recovery function                                   | Optional   |                  |
| Oversupply protection                                   | DC Type II / AC Type II  |                  |
| <b>General Data</b>                                     |  |                  |
| Dimensions (W*H*D)                                      | 370*485*160 mm   |                  |
| Weight  | 20 kg  |                  |
| Isolation method  | Transformerless  |                  |
| Degree of protection                                    | IP65   |                  |
| Night power consumption                                 | < 1 W  |                  |
| Operating ambient temperature range                     | -25 to 60 °C (> 45 °C derating)  |                  |
| Allowable relative humidity range (non-condensing)      | 0 – 100 %  |                  |
| Cooling method  | Natural cooling  |                  |
| Max. operating altitude                                 | 4000 m (> 3000 m derating)   |                  |
| Display / Communication                                 | LED, Bluetooth + APP / RS485, (WiFi, E-Net optional)   |                  |
| DC connection type                                      | MC4 (Max. 6 mm² )  |                  |
| AC connection type                                      | Plug and play connector (Max. 6 mm² )  |                  |
| Compliance  | IEC/EN 62109-1, IEC/EN 62109-2, IEC/EN 61000-3-11, IEC/EN 61000-3-12, UTE C15-712-1, IEC 61727, IEC 62116, VDE0126-1-1/4105, G59/3 |                  |
| Grid support  | Active & reactive power control and power ramp rate control  |                  |
| Type designation  | SG10KTL-M-10   | SG12KTL-M-10     |

